

LIFT



GSM LIFT PHONE

The GSM Lift Watch

The GSM Lift Watch provides two way communication between the lift cabin and the call centre via the GSM network. When the lift passenger presses the alarm button in the lift, the GSM Lift Watch automatically dials a preprogrammed number and establishes a connection with the call centre.

Features of Telstrom Lift Phones


- EN 8128 compliant
- Automatic operation over GSM network
- Automatic re-dialling of up to 8 preprogrammed phone numbers
- Hands free communication
- 1 or 2 lift cabin communication
- 5 inputs and 2 relay outputs
- Remote programming by PC or SMS
- Machine room communication

Accessories

- Machine Room Module. For communication between the machine room and the lift cabin.
- Call Centre software for the collection of calls and SMS.
- Floor announcer is used for announcing to the lift passenger, each floor, door status, cabin movement, overweight etc.


Bennefits

- Calls up to 8 preprogrammed numbers with a maximum call duration of 4 minutes.
- Installation into 1 or 2 lift cabins, (REMIC acoustic unit)
- The call centre can call and communicate to the Lift cabin. Other unknown callers to the Lift cabin are rejected.
- When using a prepay SIM card in the GSM lift phone, SMS messages are forwarded to the call centre.
- Call progress and connection tones.
- Automatic test call every 3 days.
- 12V power supply or alternative battery backup.
- Communication to the machine room.
- 2 blocking inputs – emergency calls available only during a lift failure. 2 blocking inputs might be used for sending SMS with info on a lift failure (failure signal on input longer than 2 minutes)
- Sending of preprogrammed SMS when there is a lift failure – SMS is sending during change of input status longer than 2 minutes
- SMS Commands:
 - Control of the 2 relays
 - Status of the lift (5 inputs – 2 are blocking inputs)
 - Change the CallCentre and Test numbers.
 - Control of GSM Status
 - Credit information.


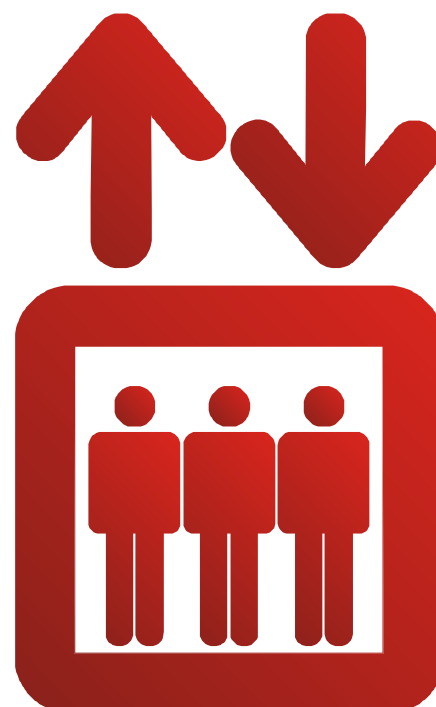


For more information, visit www.telstrom.net, email sales@telstrom.net

GSM LIFT PHONE

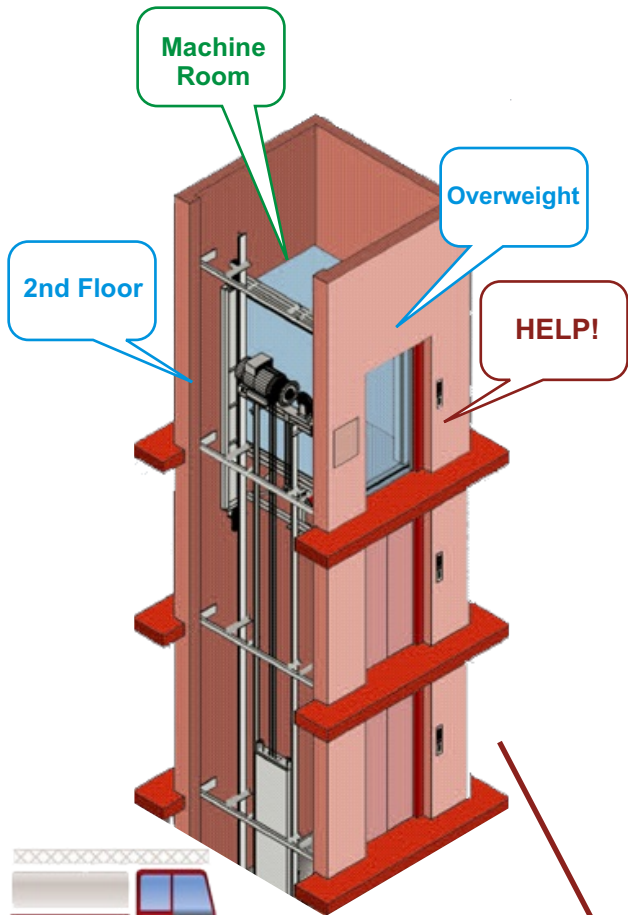

LEGEND:
LIFTWatch
ANNOUNCER
MACHINE ROOM

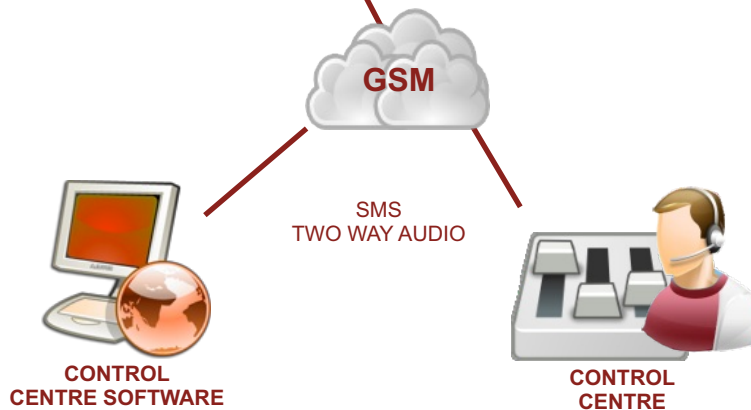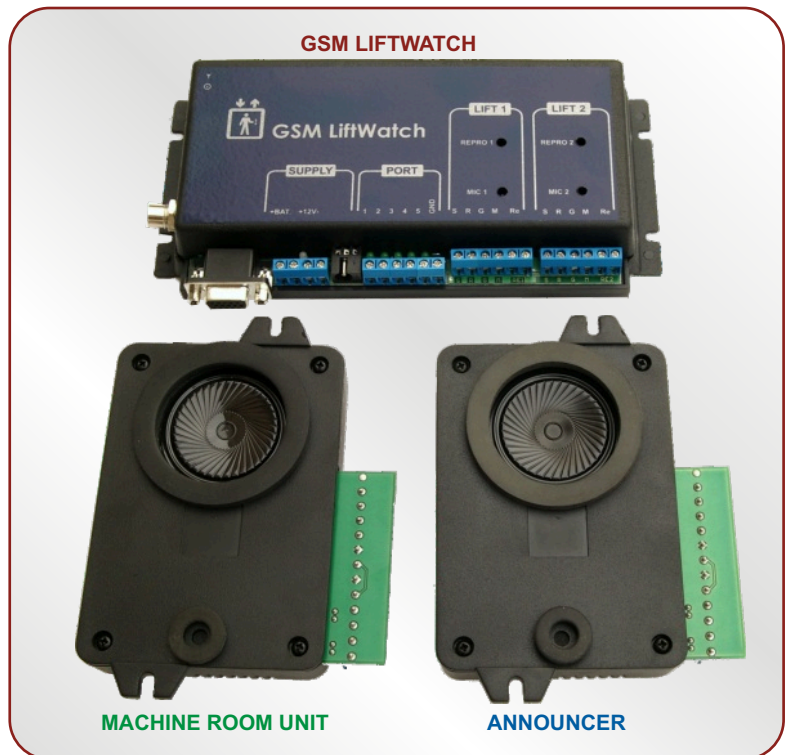

Technical Specifications

Product name:	GSM LIFT WATCH 1 or 2	Dimensions:	
Position:	Various installations	Basic Unit:	195 x 95 x 34 mm
Temperature:	5° C to 40° C	Machine Room:	110 x 78 x 52 mm
Humidity:	10% to 80% at 30° C	Announcer:	110 x 78 x 52 mm
Power Supply:	9VDC to 18VDC, 50 to 500 mA	GSM:	GSM 900 and GSM 1800
Signalling:	LED or bulbs 12V (24V) max.	SIM Card:	(3V and 1.8V)
Relays:	2 x 24V / 100 mA		