

# SLENDER DOOR PHONE


The SLENDER DOOR PHONE is the ultimate in access control for residential and business users, providing both high-end voice via your PBX or Telephone provider (PSTN)

A single output allows release of the door or perimeter gate followed by release. Access to your guest is given by selecting keys on your telephone handset (via DTMF) any time during the call.

Featuring:

- Surface installation.
- Blue Backlit LED name plates
- Solid Anodised aluminium construction
- PBX FXS or PSTN or separate 12VDC

Simple to install and easy to setup remotely using DTMF from a touch tone phone.

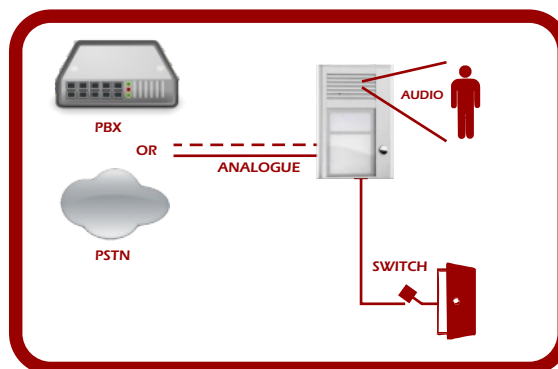

Surface Mount



Day/Night Mode



1 Switches



## Technical Specifications

Product name:	ANALOGUE SLENDER	Power Supply for:	Backlighting, switch and heating
Interface:	Analogue PSTN or PBX line	Consumption:	300mA - 12VDC
Power Supply:	12VAC or 12VDC	Max. switch voltage:	48V at I < 1A
Weight:	360 gramms	Max. current of switch:	2A at U < 30 V
Bandwidth:	300Hz - 3400 Hz	Operational temperature:	- 20 to + 50 °C
Casing:	Anodised Aluminum & Plexiglass	Dimensions in mm:	H:153 x W:104 x D:16